


Strataworx®

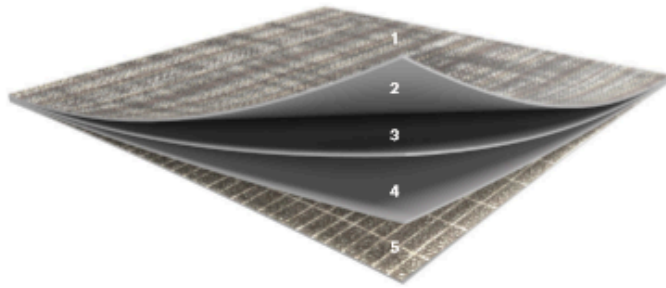

1. Face Yarn

Eco Solution Q® fiber provides long-lasting durability and stain protection.

2. Primary Backing

High-strength primary backing is non-woven and adds dimensional stability to the product.

3. Performance Precoat

Performance precoat provides tuft bind.

4. Thermoplastic Compound

Thermoplastic compound laminate bonds the carpet face to the backing for superior delamination strength.

5. PET / Fiberglass Composite Reinforcement

PET / fiberglass reinforcement creates stability.

features / benefits

Lightweight polymer composite backing system engineered for efficiency in manufacturing, transportation, and at the job site .

Post Consumer / Post Industrial Content.
 Innovative lightweight backing for maximum efficiency.
 Ease of handling, installation, and storage.
 Alternative to broadloom carpet or PVC carpet tile.

primary

Synthetic

stabilizer

Fiberglass

backing thickness

0.085 inches

dimensions

24" x 24" (standard), optional sizes available

testing

Impact Insulation Class (IIC) rating (ASTM E492-09/E989-06) when paired with the appropriate StrataWorx products, results typically range from 55 –65, depending on subfloor assembly and StrataWorx products. For specific results, please contact your account manager.

environmental

See specific product specifications for environmental information / certifications.

installation

Full Spread 3000,5000,4151, Advantage System, LokDots, LokWorx Tabs

warranty

Carpet Tile 15 Year Commercial Limited Warranty for StrataWorx
 Carpet Tile 15 Year Commercial Limited Warranty with Stain and Color for StrataWorx

